

GPS Engine Board EB-3531

Version 1.0

08/13/2007

Globalsat Technology Corporation Headquarters (Far East Century Park)

16F., No. 186, Jian-Yi Road, Chung-Ho City, Taipei Hsien 235, Taiwan

Tel: 886-2-8226-3799/ Fax: 886-2-8226-3899

E-mail : service@globalsat.com.tw

Website: www.globalsat.com.tw

1. Product Information

- Product Name: EB-3531
- Product Description:

EB-3531 is a compact, high performance, and low power consumption GPS engine board. It uses SiRF Star III chipset which can track up to 20 satellites at a time and perform fast TTFF in weak signal environments. EB-3531 is suitable for the following applications:

- Automotive navigation
- Personal positioning
- Fleet management
- Mobile phone navigation
- Marine navigation

- Product Features:

- ✓ SiRF star III high performance GPS Chipset
- ✓ Very high sensitivity (Tracking Sensitivity: -159 dBm)
- ✓ Extremely fast TTFF (Time To First Fix) at low signal level
- ✓ Two serial ports
- ✓ 4Mb flash
- ✓ Built-in LNA
- ✓ Compact size (15mm * 13mm * 2.2mm) suitable for space-sensitive application
- ✓ One size component, easy to mount on another PCB board
- ✓ Support NMEA 0183 and SiRF binary protocol


- Product Specifications

GPS Receiver	
Chipset	SiRF GSC3f/LP
Frequency	L1, 1575.42 MHz
Code	C/A Code
Protocol	NMEA 0183 v3.0 Default:GGA,GSA,GSV,RMC Support:VTG,GLL,ZDA) SiRF binary and NMEA Command
Available Baud Rate	4,800 to 57,600 bps adjustable


Channels	20
Flash	4Mbit
Sensitivity	Tracking: -159dBm
Cold Start	42 seconds, average
Warm Start	38 seconds, average
Hot Start	1 second, average
Reacquisition	0.1 second, average
Accuracy	Position: 10 meters, 2D RMS 5 meters, 2D RMS, WAAS enabled Velocity: 0.1 m/s Time: 1us synchronized to GPS time
Maximum Altitude	< 18,000 meter
Maximum Velocity	< 515 meter/second
Maximum Acceleration	< 4G
Update Rate	1 Hz
DGPS	WAAS, EGNOS, MSAS
Datum	WGS-84
Interface	
I/O Pins	2 serial ports
Physical Characteristic	
Type	22-pin stamp holes
Dimensions	15 mm * 13mm * 2.2 mm ±0.2mm
DC Characteristics	
Power Supply	3.3Vdc ± 5%
Backup Voltage	2.0 ~ 3.6Vdc
Power Consumption	Acquisition: 42mA
Environmental Range	
Humidity Range	5% to 95% non-condensing
Operation Temperature	-30°C to 85°C
Storage Temperature	-40°C to 125°C

2. Technical Information


■ Block Diagram

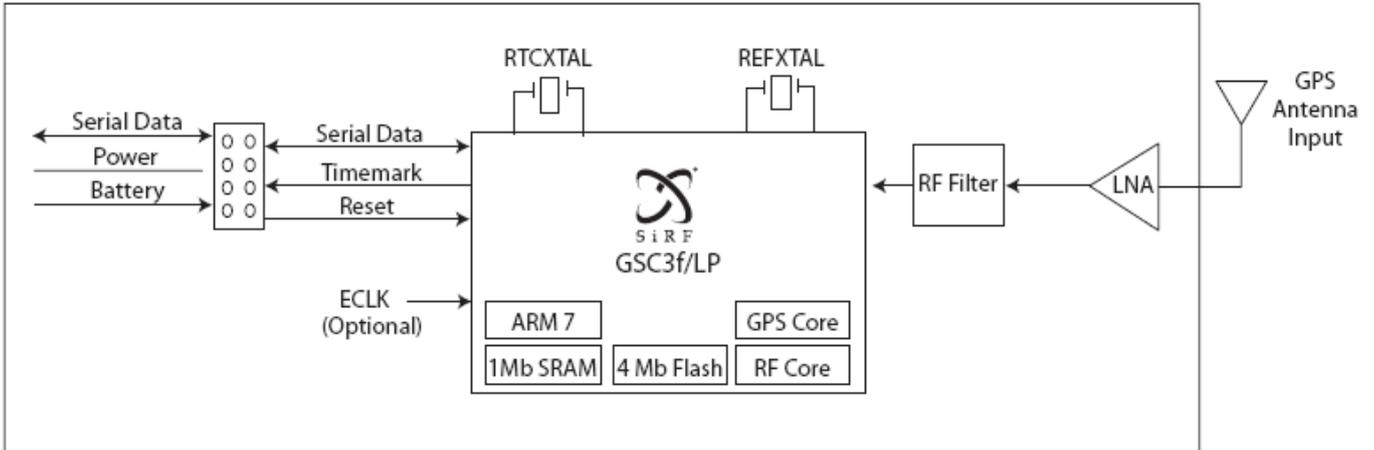


■ Module Pin Assignment:

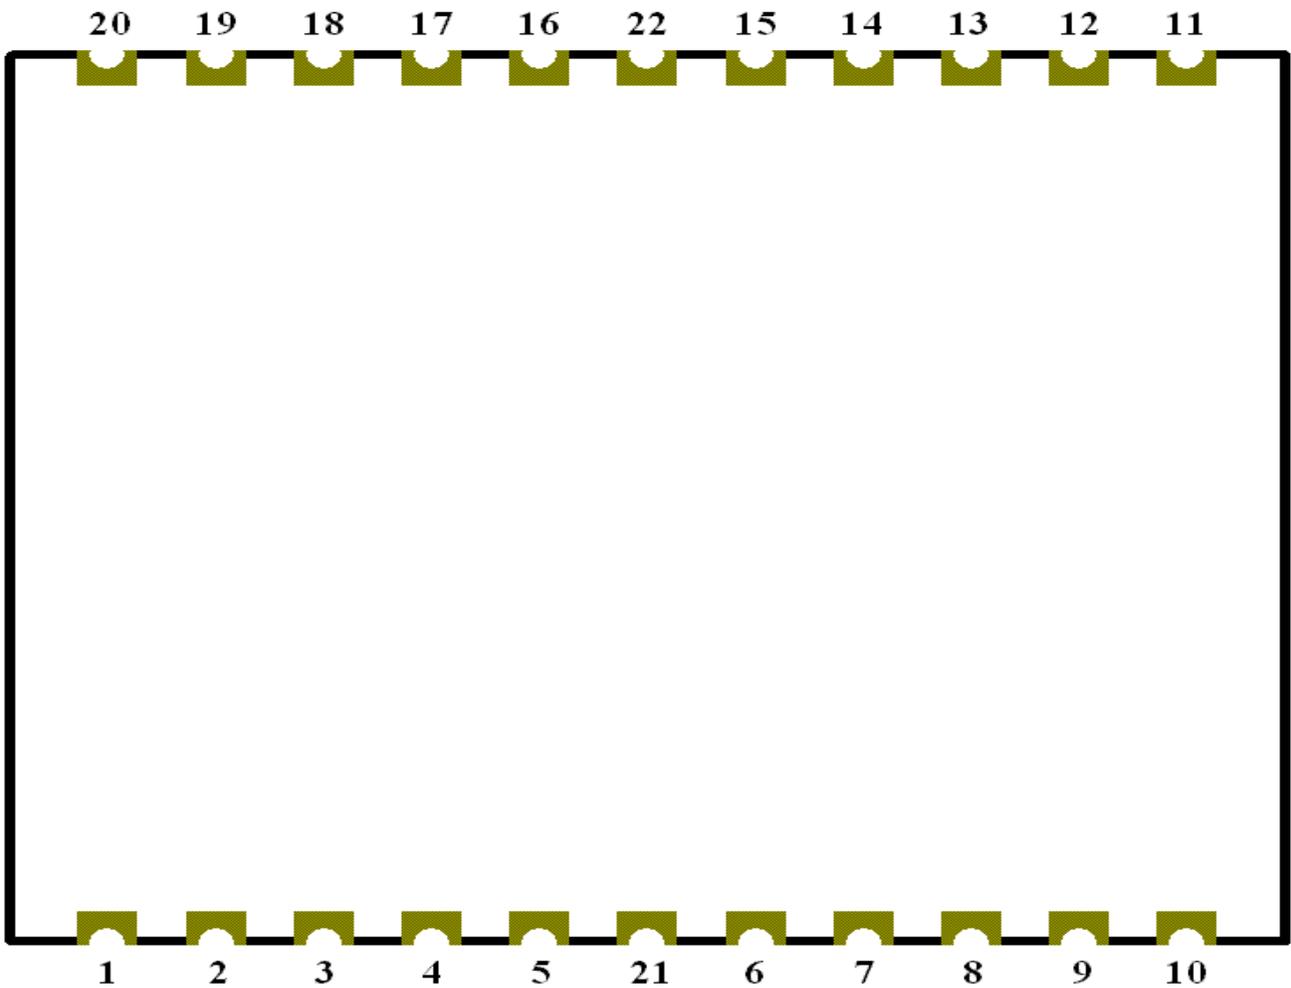


Pin NO.	Pin Name	I/O	Remark
1.	RXB	I	For user's application (not currently used).
2.	TXB	O	For user's application (not currently used).
3.	TIMEMARK	I/O	One pulse per second.
4.	TXA	O	This is the main transmits channel for outputting navigation and measurement data to user's navigation software or user written software. Output TTL level, 0V ~ 2.85V.
5.	RXA	I	This is the main receive channel for receiving software commands to the engine board from SiRFdemo software or from user written software.
6.	NC		NC
7.	GPIO0	I/O	General purpose I/O
8.	GPIO1	I/O	General purpose I/O
9.	RF_PWR	CTR	RF Power ON/OFF.
10.	ON_OFF	I	Edge triggered soft on/off request. It must be low for normal application.
11.	VBAT	I	This is the battery backup input that powers the SRAM and RTC, The battery voltage should be between 2.0v and 3.6
12.	VCC	PWR	Main power supply to the engine board.
13.	GPIO13	I/O	General purpose I/O
14.	GPIO14	I/O	General purpose I/O
15.	GPIO15	O	GPS status output.
16.	BOOTSEL	I/O	Set this pin to high for programming flash.
17.	VCC_RF	PWR	Regulated RF power output.
18.	GND	G	Ground.
19.	RF IN	RF	GPS antenna input.
20.	GND	G	Ground.
21.	GND	G	Ground.
22.	GND	G	Ground.

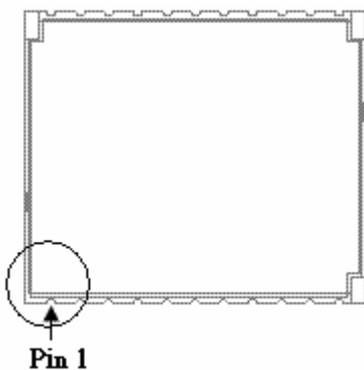

■ Application Circuit

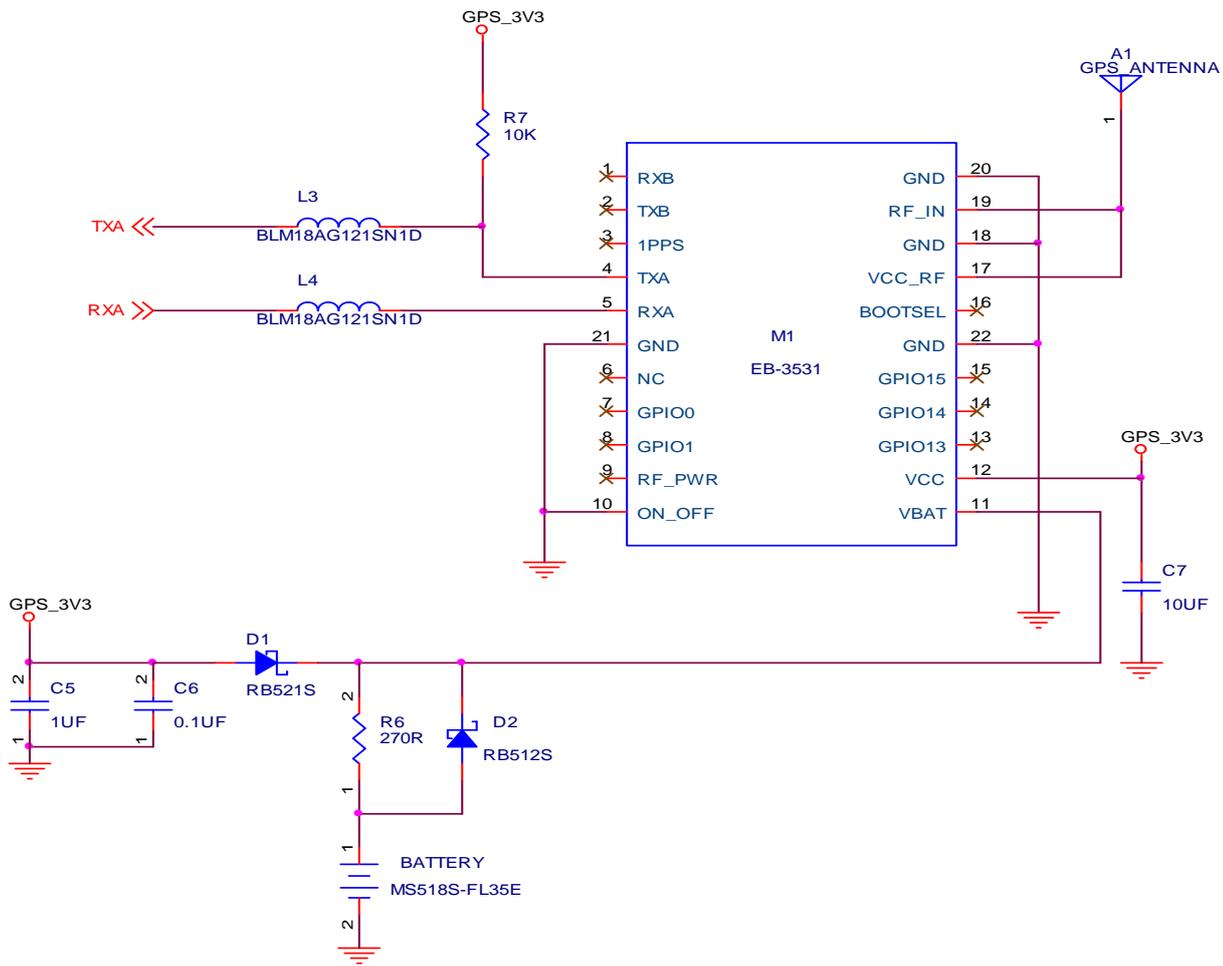

GPS POWER

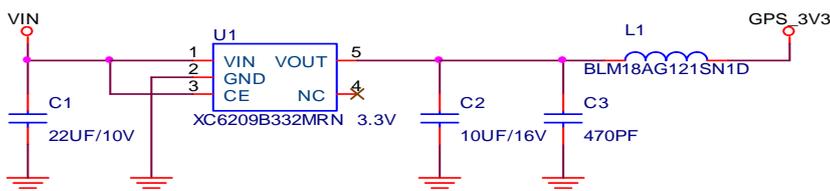

GPS Active Antenna Specifications (Recommendation)

Frequency: 1575.42 + 2MHz

Axial Ratio: 3 dB Typical

Output Impedance: 50Ω

Polarization: RHCP


Amplifier Gain: 18~22dB Typical

Output VSWR: 2.0 Max.


Noise Figure: 2.0 dB Max

Antenna Input Voltage: 2.85V (Typ.)

■ Dimensions

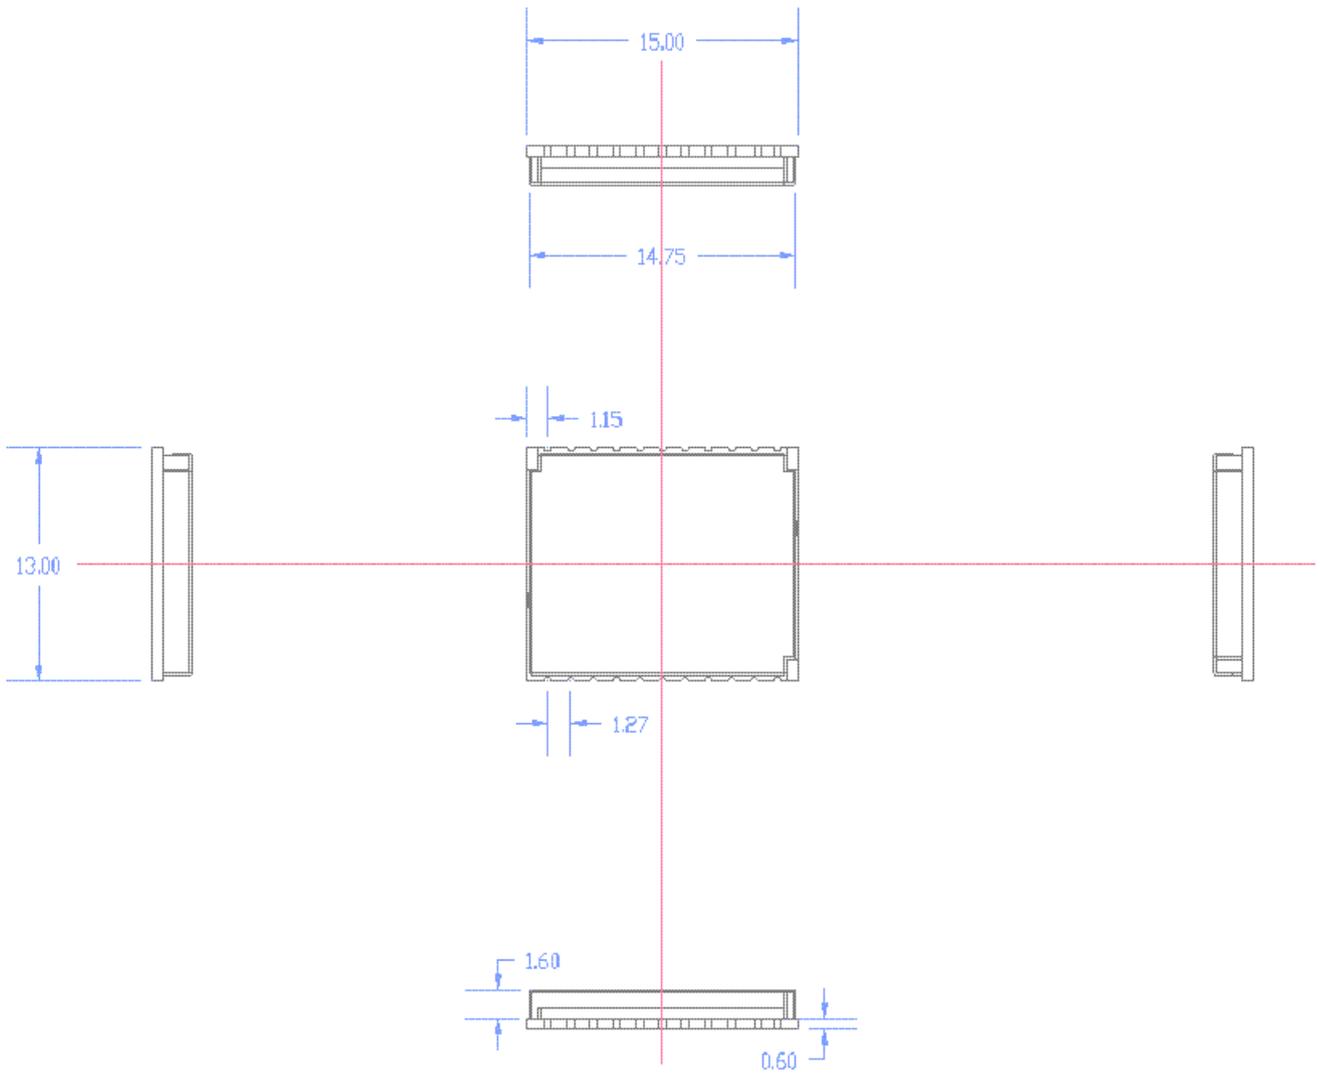

■ Recommend Layout PAD

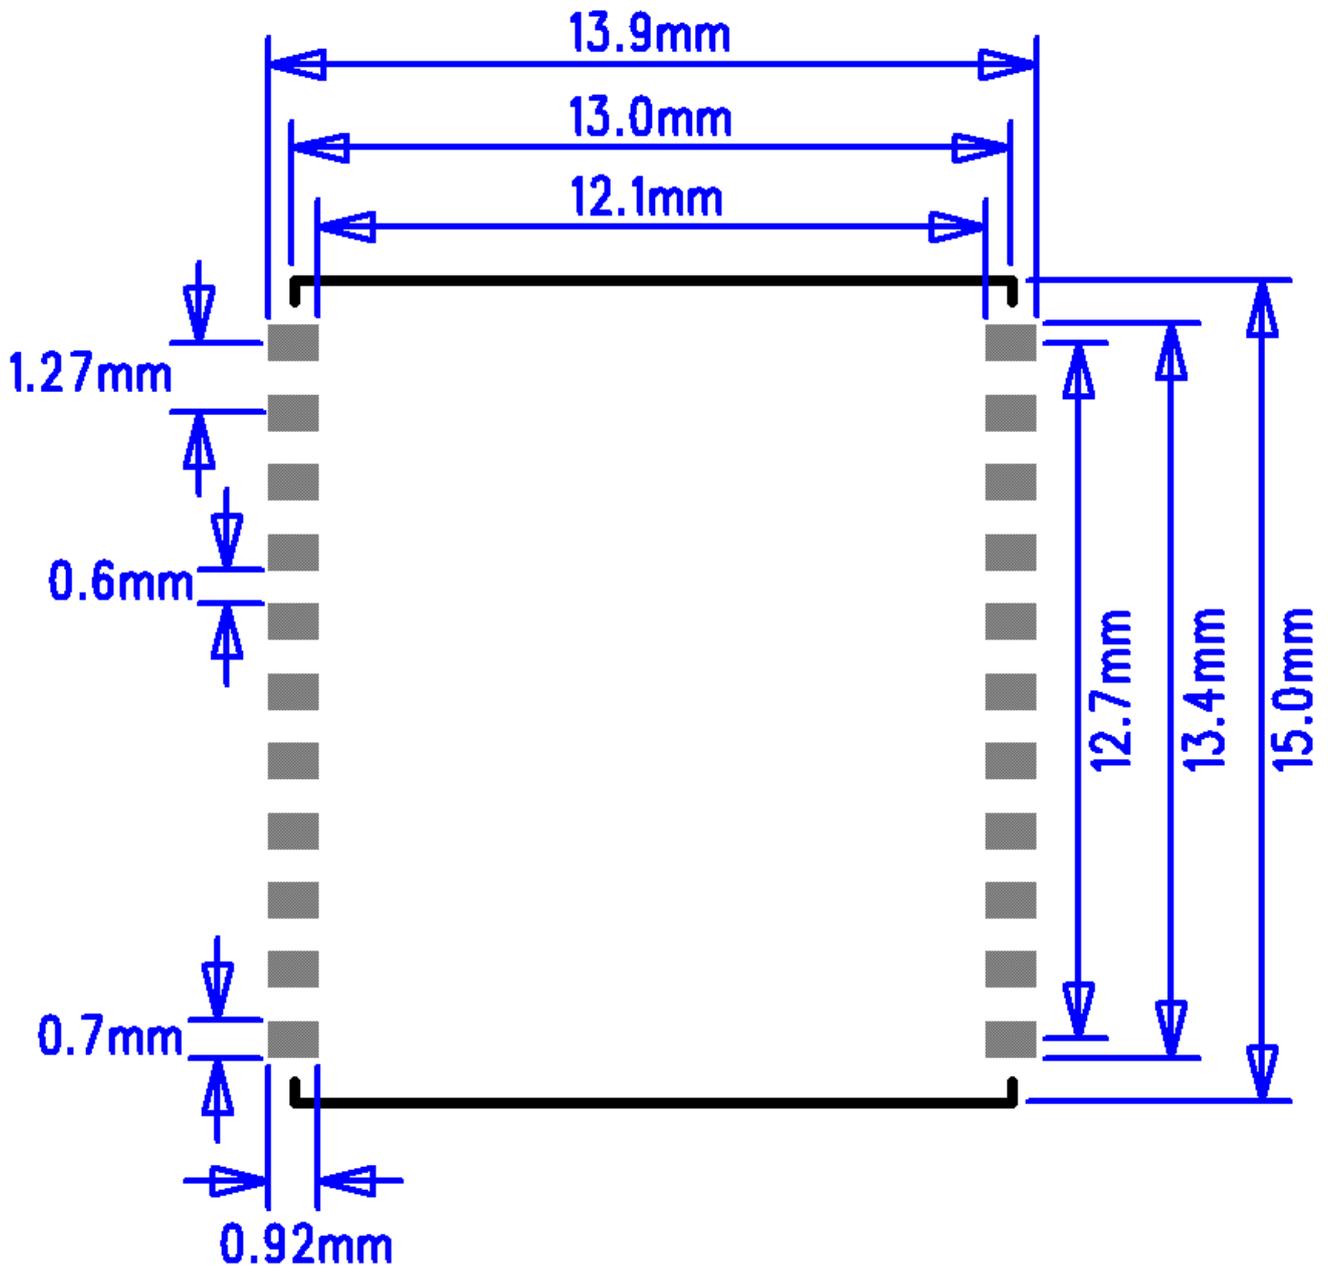


Tolerances : $\pm 0.1\text{mm}$

EB-3531 Application guideline


Application Circuit

1.

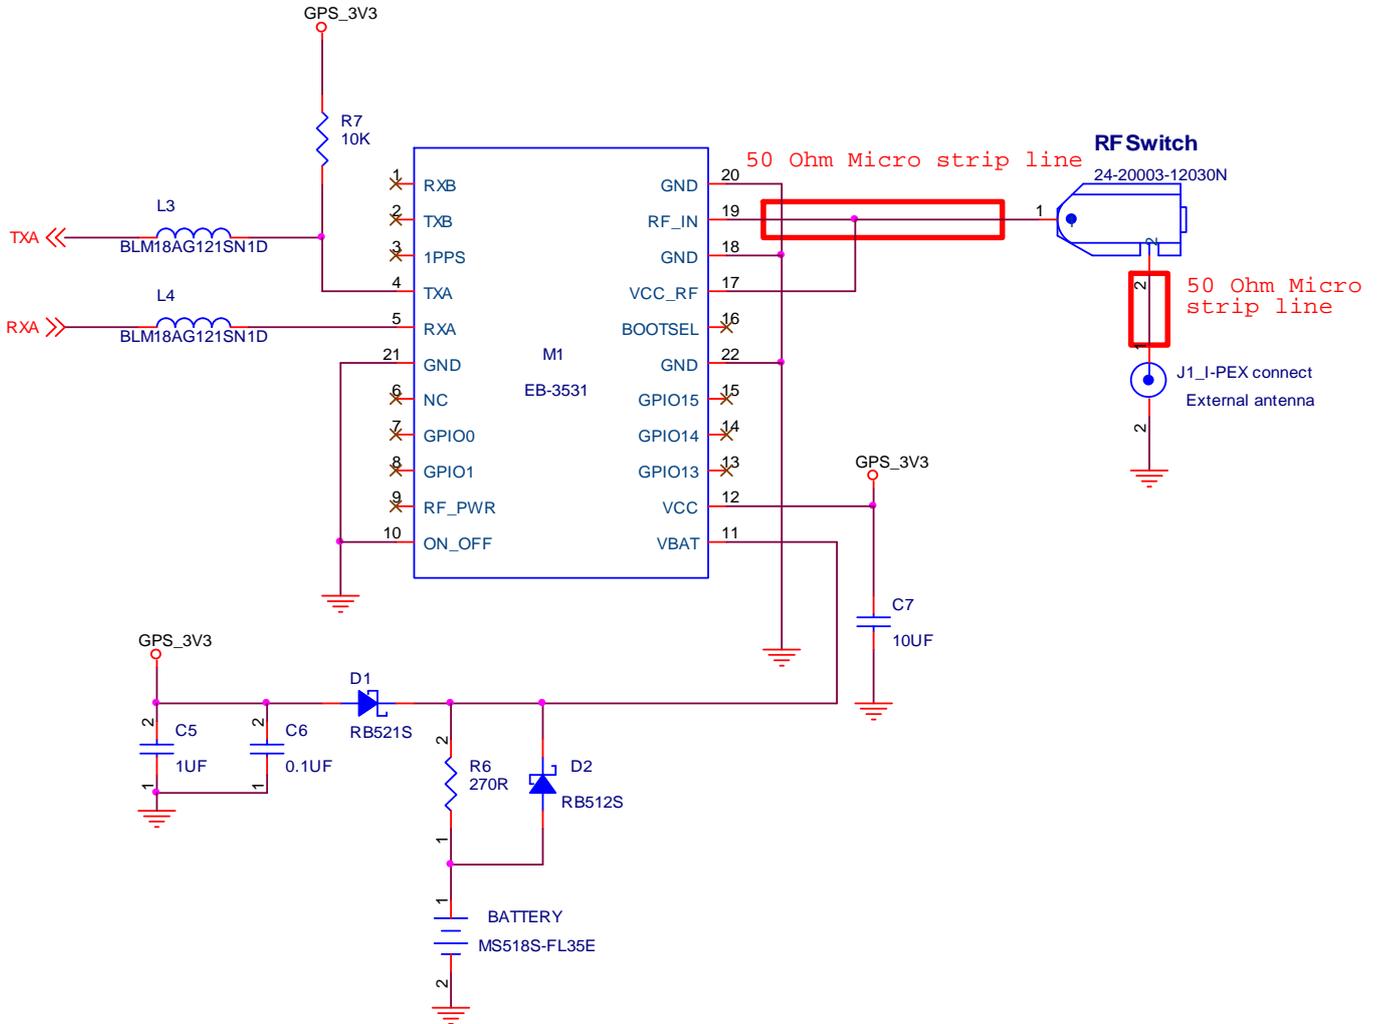

2.

GPS POWER

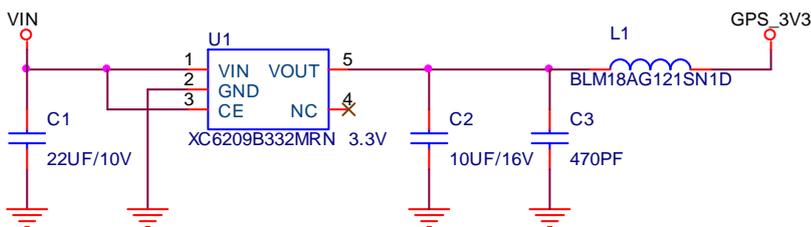

Layout Rules

Do not routing the other signal or power trace under the engine board.

*** RF:**

This pin receives signal of GPS analog via external active antenna. It has to be a controlled impedance trace at 50ohm.

Do not place the RF traces close to the other signal path and not routing it on the top layer.

Keep the RF traces as short as possible.

*** Antenna:**

Keep the active antenna on the top of your system and confirm the antenna radiation pattern 、 axial ratio 、 power gain 、 noise figure 、 VSWR are correct when you Setup the antenna in your case.

GPS Passive (or Active) Antenna Specifications (Recommendation)

Frequency: 1575.42±2 MHz

Axial Ratio: 3 dB Typical

Output Impedance: 50Ω

Polarization: RHCP

Output VSWR: 1.5 Max.

Active option**Low Noise Amplifier:**

Amplifier Gain :18~22dB Typical

Output VSWR: 2.0 Max.

Noise Figure: 2.0 dB Max.

Antenna Input Voltage : 2.85V Typical

Definition of Pin assignment**VCC**

This is the main power supply to the engine board. (3.3Vdc \pm 5%)

GND

Ground pin for the baseband circuit.

RXA

This is the main channel for receiving software commands from SiRFdemo software or from your proprietary software.

RXB

For user's application (not currently used).

TXA

This is the main channel for transmitting navigation and measurement data to a navigation software or user written software.

Output TTL level, 0V ~ 2.85V

TXB

For user's application (not currently used).

RF_IN

This pin receives signal of GPS analog via external active antenna. It has to be a controlled impedance trace at 50ohm. Do not have RF traces closed the other signal path and routing it on the top layer.

Keep the RF traces as short as possible.

VBAT

This is the battery backup power input for the SRAM and RTC when main power is removed. Typically, the current draw is 15uA. Without the external backup battery, the module/engine board will always execute a cold star after turning on. To achieve the faster start-up offered by a hot or warm start, a battery backup must be connected. The battery voltage should be between 2.0v and 3.6v.

GPIO

User can use this I/O pin for special functions. (For example, control LED)

BOOTSEL

Set this pin to high for programming flash.

VCC_RF

Provide Active Antenna Power 2.85V

ON_OFF

Edge triggered soft on/off request. It must be low for normal application.

GPIO15

GPS status output. You can connect it to an LED.

Tracking: 

Fixing: Hi

RF_PWR_CTRL

RF power ON/OFF control:


Hi : RF Power ON

Low : RF Power OFF


EB-3531 Demo Kit Test Description

Connect J2 of the demo kit (Male) to J5 of the Test Board (Female) as the diagram below.

Engine Board Tester Description

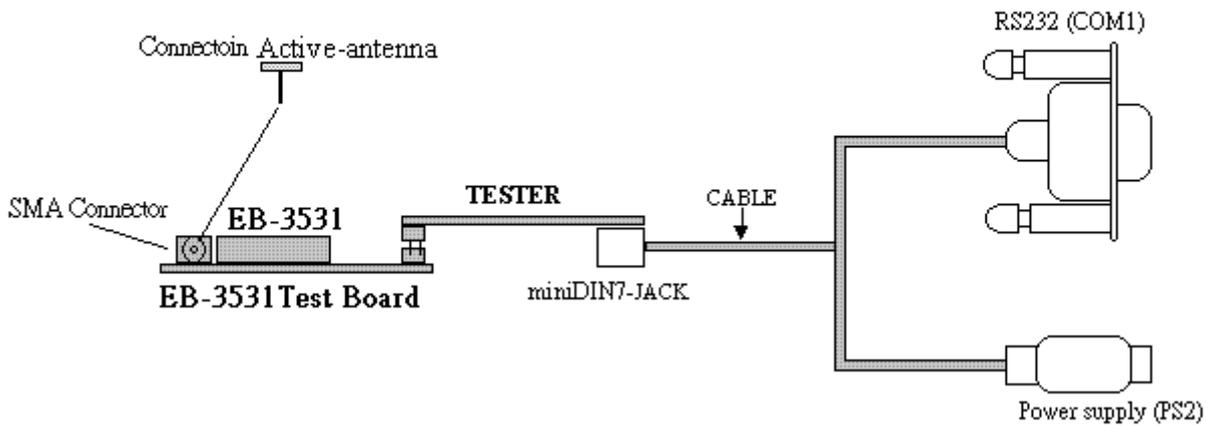

Pin Assignment:

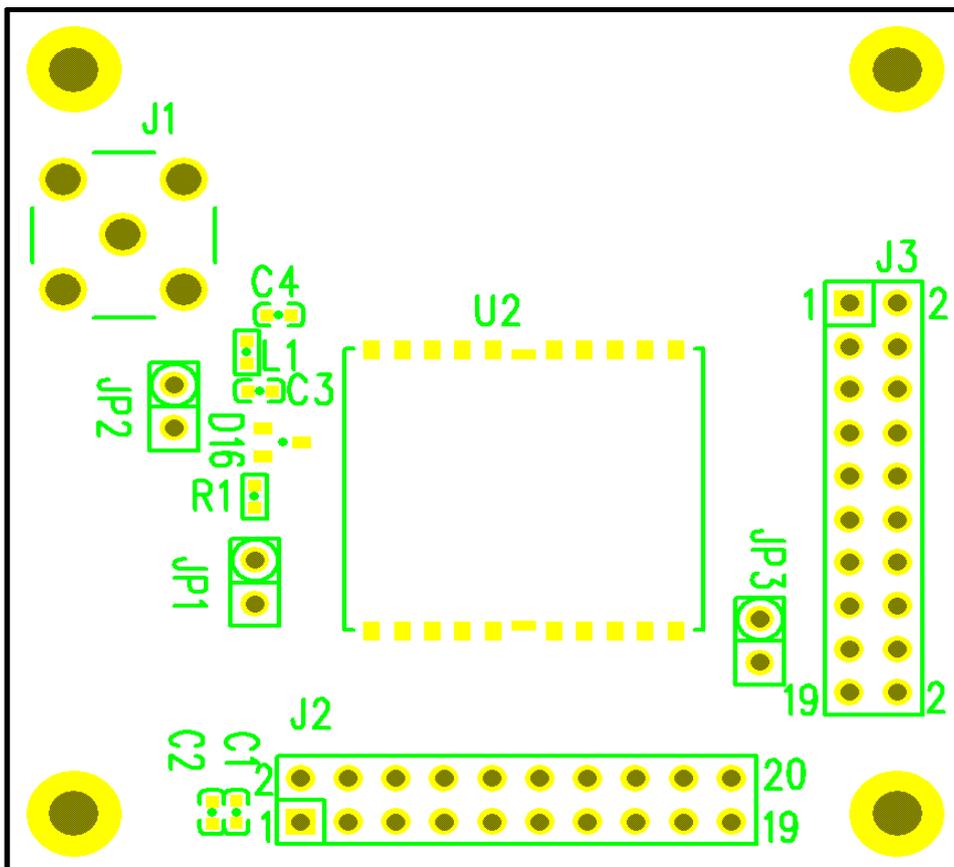

J2:

Pin	Signal Name	Pin	Signal Name
1	NC	2	VCC
3	NC	4	VCC
5	NC	6	NC
7	NC	8	NC
9	NC	10	GND
11	TXA	12	RXA
13	GND	14	TXB
15	RXB	16	GND
17	NC	18	GND
19	NC	20	NC



J3

Pin	Signal Name	Pin	Signal Name
1	TIMEMARK	2	VCC_RF
3	NC	4	GPIO15
5	GPIO0	6	GPIO14
7	GPIO1	8	GPIO13
9	RF_PWR	10	NC
11	NC	12	NC
13	NC	14	NC
15	NC	16	NC
17	NC	18	NC
19	NC	20	NC

JP1: VBAT

Test Software (GPSinfo):

1. Select COM Port & Baud Rate
2. Press Start GPS

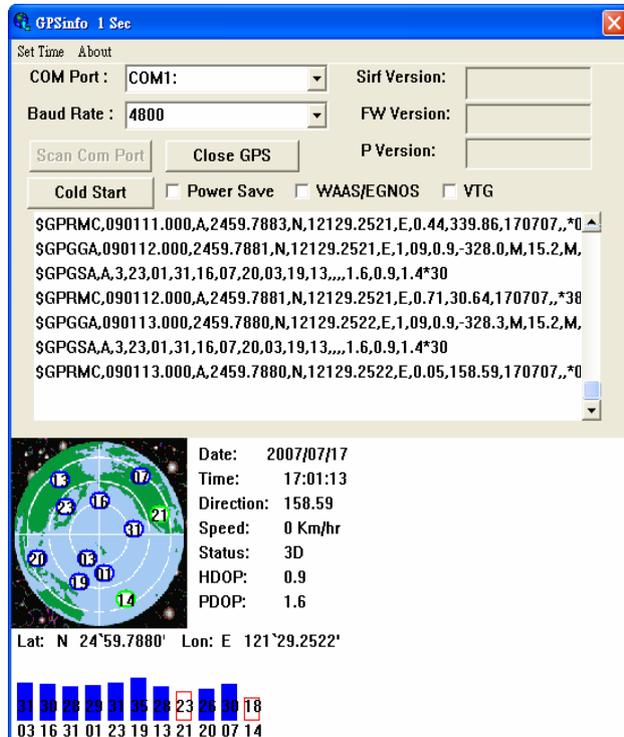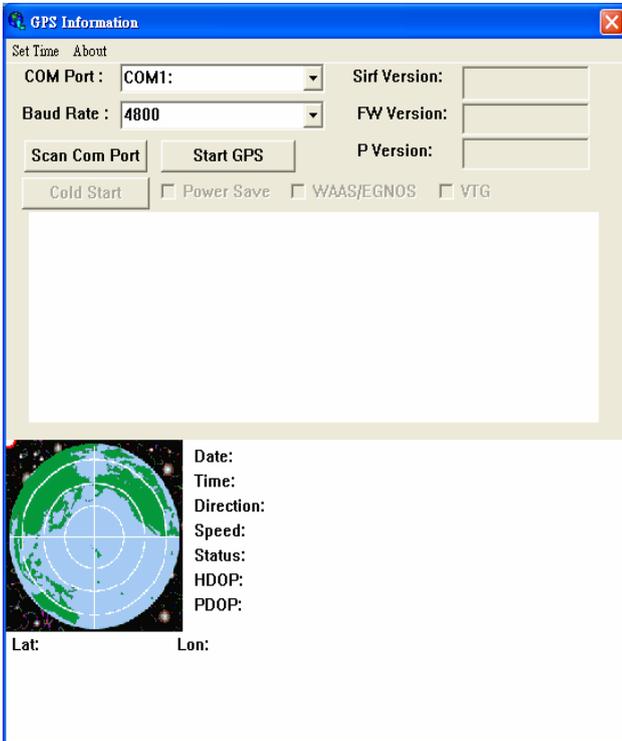

SOFTWARE COMMAND

NMEA Output Command

GGA-Global Positioning System Fixed Data

Table B-2 contains the values for the following example:

\$GPGGA,161229.487,3723.2475,N,12158.3416,W,1,07,1.0,9.0,M,,,,0000*18

Table B-2 GGA Data Format

Name	Example	Units	Description
Message ID	\$GPGGA		GGA protocol header
UTC Time	161229.487		hhmmss.sss
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Position Fix Indicator	1		See Table B-3
Satellites Used	07		Range 0 to 12
HDOP	1.0		Horizontal Dilution of Precision
MSL Altitude ¹	9.0	meters	
Units	M	meters	
Geoid Separation ¹		meters	
Units	M	meters	
Age of Diff. Corr.		second	Null fields when DGPS is not used
Diff. Ref. Station ID	0000		
Checksum	*18		
<CR><LF>			End of message termination

SiRF Technology Inc. does not support geoid corrections. Values are WGS84 ellipsoid heights.

Table B-3 Position Fix Indicator

Value	Description
0	Fix not available or invalid
1	GPS SPS Mode, fix valid
2	Differential GPS, SPS Mode, fix valid
3	GPS PPS Mode, fix valid

GLL-Geographic Position-Latitude/Longitude

Table B-4 contains the values for the following example:

\$GPGLL,3723.2475,N,12158.3416,W,161229.487,A*2C

Table B-4 GLL Data Format

Name	Example	Units	Description
Message ID	\$GPGLL		GLL protocol header
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	n		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
UTC Position	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Checksum	*2C		
<CR><LF>			End of message termination

GSA-GNSS DOP and Active Satellites

Table B-5 contains the values for the following example:

\$GPGSA,A,3,07,02,26,27,09,04,15,,,,,1.8,1.0,1.5*33

Table B-5 GSA Data Format

Name	Example	Units	Description
Message ID	\$GPGSA		GSA protocol header
Mode1	A		See Table B-6
Mode2	3		See Table B-7
Satellite Used ¹	07		Sv on Channel 1
Satellite Used ¹	02		Sv on Channel 2
.....			
Satellite Used ¹			Sv on Channel 12
PDOP	1.8		Position dilution of Precision
HDOP	1.0		Horizontal dilution of Precision
VDOP	1.5		Vertical dilution of Precision
Checksum	*33		
<CR><LF>			End of message termination

1. Satellite used in solution.

Table B-6 Mode1

Value	Description
M	Manual-forced to operate in 2D or 3D mode
A	2Dautomatic-allowed to automatically switch 2D/3D

Table B-7 Mode 2

Value	Description
1	Fix Not Available
2	2D
3	3D

GSV-GNSS Satellites in View

Table B-8 contains the values for the following example:

\$GPGSV,2,1,07,07,79,048,42,02,51,062,43,26,36,256,42,27,27,138,42*71

\$GPGSV,2,2,07,09,23,313,42,04,19,159,41,15,12,041,42*41

Table B-8 GSV Data Format

Name	Example		Description
Message ID	\$GPGSV		GSV protocol header
Number of Messages ¹	2		Range 1 to 3
Message Number ¹	1		Range 1 to 3
Satellites in View	07		
Satellite ID	07		Channel 1(Range 1 to 32)
Elevation	79	degrees	Channel 1(Maximum90)
Azimuth	048	degrees	Channel 1(True, Range 0 to 359)
SNR(C/No)	42	dBHz	Range 0 to 99,null when not tracking
.....		
Satellite ID	27		Channel 4 (Range 1 to 32)
Elevation	27	Degrees	Channel 4(Maximum90)
Azimuth	138	Degrees	Channel 4(True, Range 0 to 359)
SNR(C/No)	42	dBHz	Range 0 to 99,null when not tracking
Checksum	*71		
<CR><LF>			End of message termination

Depending on the number of satellites tracked multiple messages of GSV data may be required.

RMC-Recommended Minimum Specific GNSS Data

Table B-10 contains the values for the following example:

\$GPRMC,161229.487,A,3723.2475,N,12158.3416,W,0.13,309.62,120598,,*10

Table B-10 RMC Data Format

Name	Example	Units	Description
Message ID	\$GPRMC		RMC protocol header
UTC Time	161229.487		hhmmss.sss
Status	A		A=data valid or V=data not valid
Latitude	3723.2475		ddmm.mmmm
N/S Indicator	N		N=north or S=south
Longitude	12158.3416		dddmm.mmmm
E/W Indicator	W		E=east or W=west
Speed Over Ground	0.13	knots	
Course Over Ground	309.62	degrees	True
Date	120598		ddmmyy
Magnetic Variation ²		degrees	E=east or W=west
Checksum	*10		
<CR><LF>			End of message termination

SiRF Technology Inc. does not support magnetic declination. All “course over ground” data are geodetic WGS48 directions.

VTG-Course Over Ground and Ground Speed

\$GPVTG,309.62,T,,M,0.13,N,0.2,K*6E

Name	Example	Units	Description
Message ID	\$GPVTG		VTG protocol header
Course	309.62	degrees	Measured heading
Reference	T		True
Course		degrees	Measured heading
Reference	M		Magnetic
Speed	0.13	knots	Measured horizontal speed
Units	N		Knots
Speed	0.2	Km/hr	Measured horizontal speed
Units	K		Kilometers per hour
Checksum	*6E		
<CR><LF>			End of message termination

2.2 NMEA Input Command

A). Set Serial Port ID:100 Set PORTA parameters and protocol

This command message is used to set the protocol(SiRF Binary, NMEA, or USER1) and/or the communication parameters(baud, data bits, stop bits, parity). Generally,this command would be used to switch the module back to SiRF Binary protocol mode where a more extensive command message set is available. For example,to change navigation parameters. When a valid message is received,the parameters will be stored in battery backed SRAM and then the receiver will restart using the saved parameters.

Format:

\$PSRF100,<protocol>,<baud>,<DataBits>,<StopBits>,<Parity>*CKSUM
<CR><LF>

<protocol>	0=SiRF Binary, 1=NMEA, 4=USER1
<baud>	1200, 2400, 4800, 9600, 19200, 38400
<DataBits>	8,7. Note that SiRF protocol is only valid f8 Data bits
<StopBits>	0,1

<Parity> 0=None, 1=Odd, 2=Even

Example 1: Switch to SiRF Binary protocol at 9600,8,N,1

```
$PSRF100,0,9600,8,1,0*0C<CR><LF>
```

Example 2: Switch to User1 protocol at 38400,8,N,1

```
$PSRF100,4,38400,8,1,0*38<CR><LF>
```

****Checksum Field:** The absolute value calculated by exclusive-OR the 8 data bits of each character in the Sentence, between, but excluding “\$” and “*”. The hexadecimal value of the most significant and least significant 4 bits of the result are converted to two ASCII characters (0-9,A-F) for transmission. The most significant character is transmitted first.

****<CR><LF>** : Hex 0D 0A

B). Navigation Initialization ID : 101 Parameters required for start

This command is used to initialize the module for a warm start, by providing current position (in X, Y, Z coordinates), clock offset, and time. This enables the receiver to search for the correct satellite signals at the correct signal parameters. Correct initialization parameters will enable the receiver to acquire signals more quickly, and thus, produce a faster navigational solution.

When a valid Navigation Initialization command is received, the receiver will restart using the input parameters as a basis for satellite selection and acquisition.

Format :

```
$PSRF101,<X>,<Y>,<Z>,<ClkOffset>,<TimeOfWeek>,<WeekNo>,<chnlCount>,<ResetCfg>  
*CKSUM<CR><LF>
```

<X>	X coordinate position INT32
<Y>	Y coordinate position INT32
<Z>	Z coordinate position INT32

<ClkOffset> Clock offset of the receiver in Hz, Use 0 for last saved value if available. If this is unavailable, a default value of 75000 for GSP1, 95000 for GSP 1/LX will be used.

INT32

<TimeOf Week> GPS Time Of Week

UINT32

<WeekNo> GPS Week Number

UINT16

(Week No and Time Of Week calculation from UTC time)

<chnlCount> Number of channels to use.1-12. If your CPU throughput is not high enough, you could decrease needed throughput by reducing the number of active channels

UBYTE

<ResetCfg> bit mask

0×01=Data Valid warm/hotstarts=1

0×02=clear ephemeris warm start=1

0×04=clear memory. Cold start=1

UBYTE

Example: Start using known position and time.

```
$ PSRF101,-2686700,-4304200,3851624,96000,497260,921,12,3*7F
```

C). Set DGPS Port ID:102 Set PORT B parameters for DGPS input

This command is used to control Serial Port B that is an input only serial port used to receive

RTCM differential corrections.

Differential receivers may output corrections using different

communication parameters.

The default

communication parameters for PORT B are 9600

Baud, 8data bits, 0 stop bits, and no parity.

If a DGPS receiver

is used which has different communication parameters, use this command to allow the receiver to

correctly decode the data. When a valid message is received, the parameters will be stored in

battery backed SRAM and then the receiver will restart using the saved parameters.

Format:

```
$ PSRF102,<Baud>,<DataBits>,<StopBits>,<Parity>*CKSUM<CR><LF>
```

<baud> 1200,2400,4800,9600,19200,38400

<DataBits> 8

<StopBits> 0,1

<Parity> 0=None,Odd=1,Even=2

Example: Set DGPS Port to be 9600,8,N,1

\$ PSRF102,9600,8,1.0*12

D). Query/Rate Control ID:103 Query standard NMEA message and/or set output rate

This command is used to control the output of standard NMEA message GGA, GLL, GSA, GSV

RMC, VTG. Using this command message, standard NMEA message may be polled once, or setup for periodic output. Checksums may also be enabled or disabled depending on the needs of the receiving program. NMEA message settings are saved in battery backed memory for each entry when the message is accepted.

Format:

\$ PSRF103,<msg>,<mode>,<rate>,<cksumEnable>*CKSUM<CR><LF>

<msg> 0=GGA,1=GLL,2=GSA,3=GSV,4=RMC,5=VTG

<mode> 0=SetRate,1=Query

<rate> Output every <rate>seconds, off=0,max=255

<cksumEnable> 0=disable Checksum,1=Enable checksum for specified
message

Example 1: Query the GGA message with checksum enabled

\$ PSRF103,00,01,00,01*25

Example 2: Enable VTG message for a 1Hz constant output with checksum enabled

\$ PSRF103,05,00,01,01*20

Example 3: Disable VTG message

\$ PSRF103,05,00,00,01*21

E). LLA Navigation Initialization ID:104 Parameters required to start using Lat/Lon/Alt

This command is used to initialize the module for a warm start, by providing current position (in Latitude, Longitude, Altitude coordinates), clock offset, and time. This enables the receiver to search for the correct satellite signals at the correct signal parameters. Correct initialization parameters will enable the receiver to acquire signals more quickly, and thus, will produce a faster navigational solution.

When a valid LLANavigationInitialization command is received, the receiver will restart using the input parameters as a basis for satellite selection and acquisition.

Format:

\$ PSRF104,<Lat>,<Lon>,<Alt>,<ClkOffset>,<TimeOfWeek>,<WeekNo>,
<ChannelCount>,<ResetCfg>*CKSUM<CR><LF>

<Lat> Latitude position, assumed positive north of equator and negative south of

equator float, possibly signed

<Lon> Longitude position, it is assumed positive east of Greenwich
and negative west of Greenwich

Float, possibly signed

<Alt> Altitude position

float, possibly signed

<ClkOffset> Clock Offset of the receiver in Hz, use 0 for last saved value if available. If
this is unavailable, a default value of 75000 for GSP1, 95000 for GSP1/LX
will be used.

INT32

<TimeOfWeek> GPS Time Of Week

UINT32

<WeekNo> GPS Week Number

UINT16

<ChannelCount> Number of channels to use. 1-12

UBYTE

<ResetCfg> bit mask 0×01=Data Valid warm/hot starts=1

0×02=clear ephemeris warm start=1

0x04=clear memory. Cold start=1

UBYTE

Example: Start using known position and time.

```
$ PSRF104,37.3875111,-121.97232,0,96000,237759,922,12,3*37
```

F). Development Data On/Off ID:105 Switch Development Data Messages On/Off

Use this command to enable development debug information if you are having trouble getting commands accepted. Invalid commands will generate debug information that should enable the user to determine the source of the command rejection. Common reasons for input command rejection are invalid checksum or parameter out of specified range. This setting is not preserved across a module reset.

Format: \$ PSRF105,<debug>*CKSUM<CR><LF>

<debug> 0=Off,1=On

Example: Debug On \$ PSRF105,1*3E

Example: Debug Off \$ PSRF105,0*3F

G). Select Datum ID:106 Selection of datum to be used for coordinate

Transformations

GPS receivers perform initial position and velocity calculations using an earth-centered earth-fixed (ECEF) coordinate system. Results may be converted to an earth model (geoid) defined by the selected datum. The default datum is WGS 84 (World Geodetic System 1984) which provides a

worldwide common grid system that may be translated into local coordinate systems or map datums. (Local map datums are a best fit to the local shape of the earth and not valid worldwide.)

Examples:

Datum select TOKYO_MEAN

\$PSRF106,178*32

Name	Example	Units	Description
Message ID	\$PSRF106		PSRF106 protocol header
Datum	178		21=WGS84 178=TOKYO_MEAN 179=TOKYO_JAPAN 180=TOKYO_KOREA 181=TOKYO_OKINAWA
Checksum	*32		
<CR> <LF>			End of message termination