


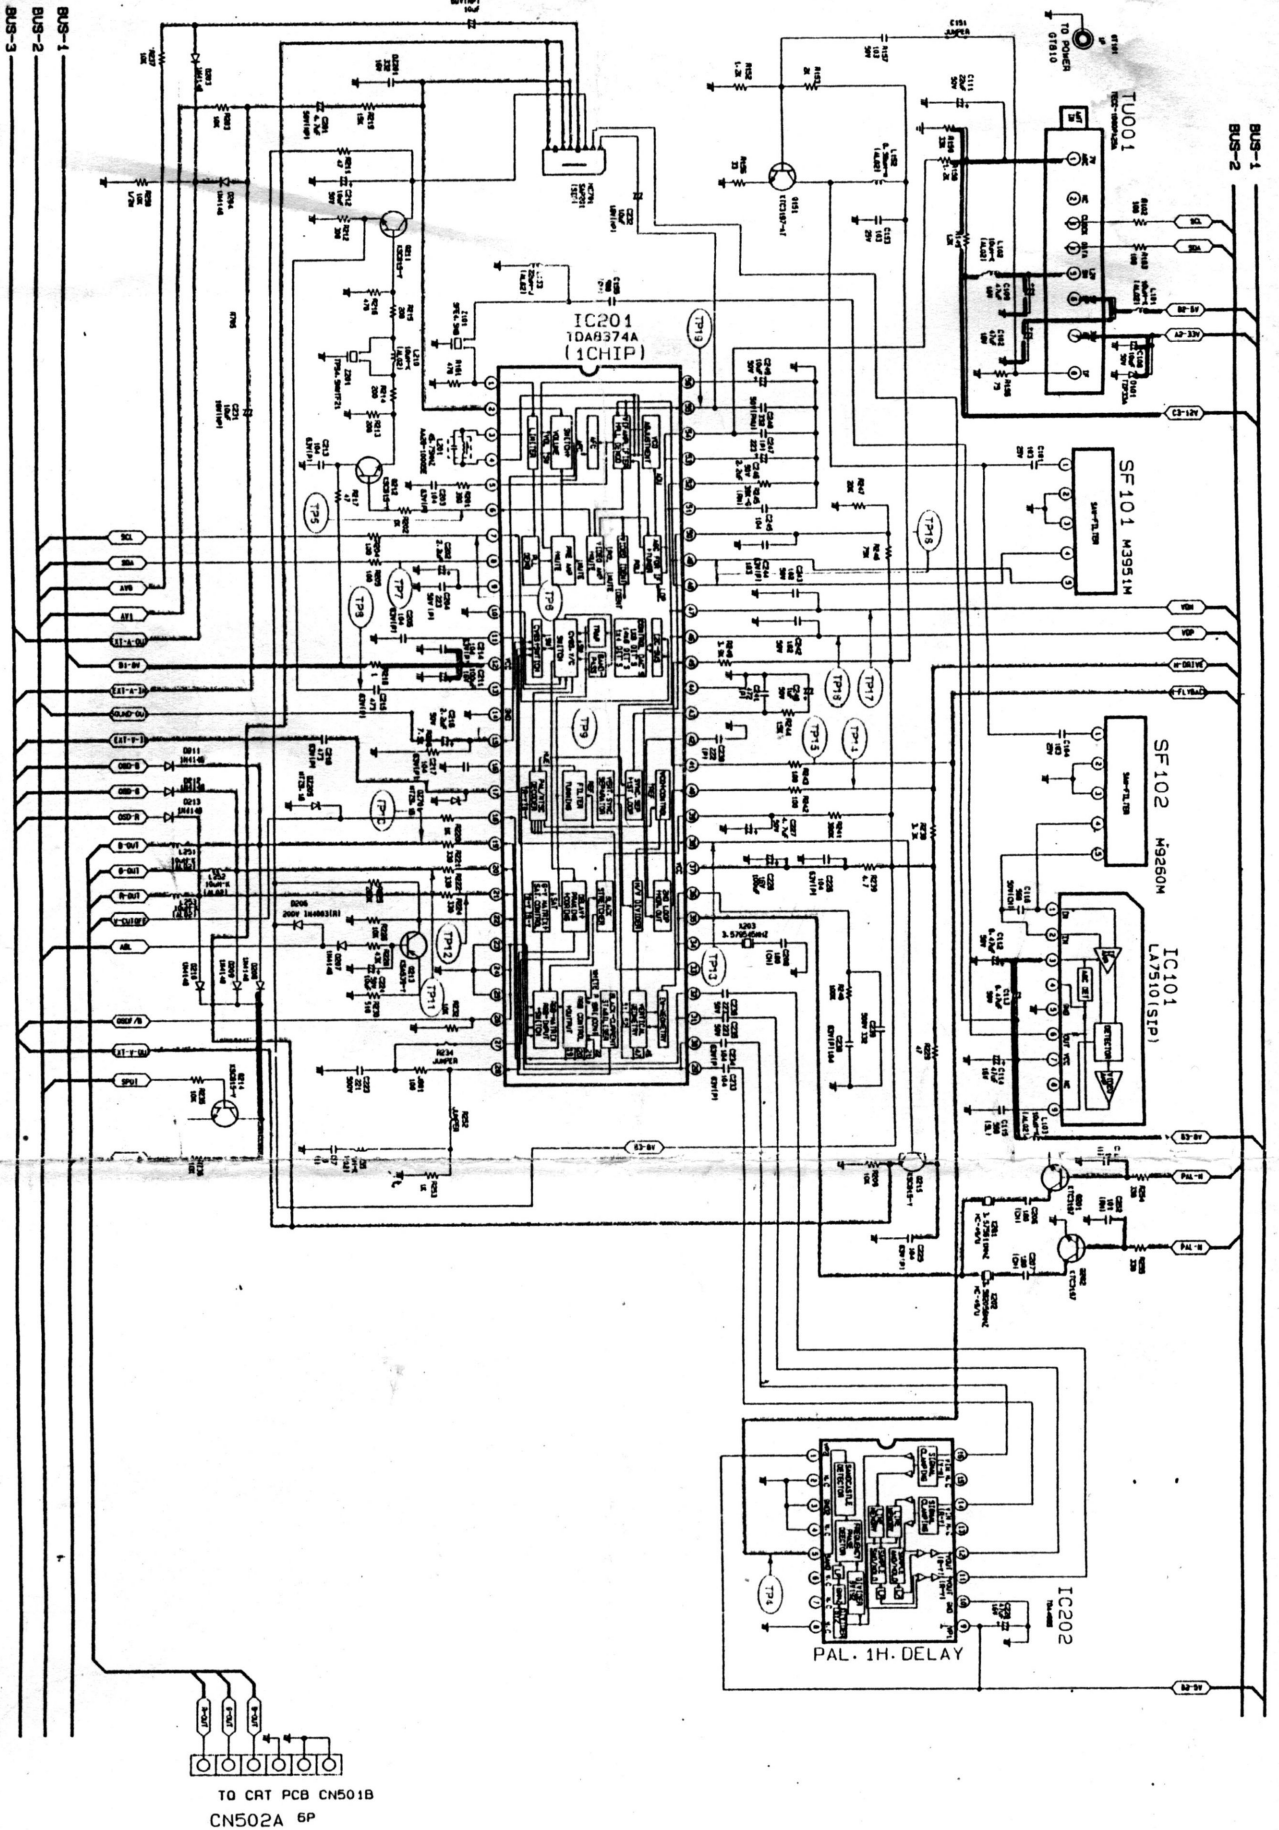

1 Resistance is shown on S-1,000 w-1,000,000.
2 Unless otherwise noted in schematic all capacitor values less
3 than 1 are expressed in μf . the values more than 1 in μf .
4 Unless otherwise noted in schematic all inductor values greater
5 than 1 are expressed in mH. the values less than 1 in μH .

The circuits are subject to change without notice to improve the picture quality.

WARNING : THIS RECEIVER CONTAINS SAFETY CRITICAL COMPONENTS. ALL PARTS SHOWN IN THE SHADED AREAS OF THE SCHEMATIC ARE SAFETY CRITICAL FOR CONTINGENCY SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS. REFER TO PARTS LIST FOR EXACT REPLACEMENTS.

CAPACITOR		kg mtrs
Ceramic - SL	dep	
Ceramic - RH	dep	
Ceramic - CH	dep	
Polyester (Insult)	dep	
Polyester (Non Insult)	dep	
Polypropylene	dep	
Metal Polyester	dep	
M.P. Polypropylene	dep	
Tantalum	dep	
Non Polar	dep	

RESISTOR		NO. PARTS
Carbon	Composition	(102)
Metal Oxide		(103)
Metal Film		(104)
Fusible		(105)
Current-Wire		(106)
Network		(107)
Metal Plate Coated		(108)
High-Ripple		(109)

