


F-1

PH Type Stepping Motors

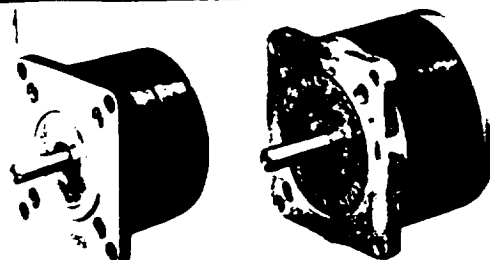

SPECIFICATIONS

Motor		Voltage	Current per phase	Holding Torque		Resistance per phase	Inductance per phase	Rotor Inertia		Weight	
Single Shaft	Double Shaft	V. DC	A/phase	OZ-in	N-cm	ohm/phase	mH/phase	OZ-in ²	g-cm ²	lbs.	kg
PH264-01	PH264-01B	4	1.1	40.3	28.4	3.6	3.6	0.3	57	0.88	0.4
PH264-02	PH264-02B	12	0.4	40.3	28.4	30	30	0.3	57	0.88	0.4
PH264-03	PH264-03B	24	0.2	40.3	28.4	120	130	0.3	57	0.88	0.4
PH265-01	PH265-01B	6	0.85	58.3	41.2	7.1	9	0.6	110	1.2	0.54
PH265-02	PH265-02B	12	0.42	58.3	41.2	29	36	0.6	110	1.2	0.54
PH265-03	PH265-03B	24	0.21	58.3	41.2	114	144	0.6	110	1.2	0.54
PH265-04	PH265-04B	5	1.0	58.3	41.2	5	6.3	0.6	110	1.2	0.54
PH265-05	PH265-05B	1.4	3.8	58.3	41.2	0.37	0.5	0.6	110	1.2	0.54
PH266-01	PH266-01B	6	1.2	83.3	58.8	5	8	0.74	135	1.3	0.6
PH266-02	PH266-02B	12	0.6	83.3	58.8	20	32	0.74	135	1.3	0.6
PH266-03	PH266-03B	24	0.3	83.3	58.8	80	128	0.74	135	1.3	0.6
PH268-21	PH268-21B	5.4	1.5	125	88.2	3.6	6	1.1	200	2.1	0.95
PH268-22	PH268-22B	12	0.68	125	88.2	17.7	30	1.1	200	2.1	0.95
PH268-23	PH268-23B	24	0.34	125	88.2	70.6	120	1.1	200	2.1	0.95
PH2610-01	PH2610-01B	6	1.88	150	105.8	3.2	7	1.75	320	2.64	1.2
PH2610-02	PH2610-02B	12	0.94	150	105.8	12.8	28	1.75	320	2.64	1.2
PH2610-03	PH2610-03B	24	0.47	150	105.8	51.0	115	1.75	320	2.64	1.2
PH296-01	PH296-01B	1.8	4.5	174	123	0.4	1.4	3.1	560	3.3	1.5
PH296-02	PH296-02B	5.5	1.25	174	123	4.4	14	3.1	560	3.3	1.5
PH296-03	PH296-03B	14	0.7	174	123	20	60	3.1	560	3.3	1.5
PH299-01	PH299-01B	3	4	306	216	0.75	4.5	6.0	1100	5.5	2.5
PH299-02	PH299-02B	6	2	306	216	3	18	6.0	1100	5.5	2.5
PH299-03	PH299-03B	12	1	306	216	12	72	6.0	1100	5.5	2.5

COLORS OF LEAD WIRES

